

Explosion Proof Indicator Summing Box / Remote Display

EXP Indicator

>SPECIFICATIONS

Specifications	Accuracy
Explosion Proof	EX IIB + H2T6
Pressure Rating	Ex tD A21 IP65 T85°C
Format Specification	DIND-Mi-EXP100
Load Cell Excitation	DC 10V (±5V)
Max. Signal Input Voltage	Max. 32mV
A/D Resolution(Internal)	520,000 Count(19bit)
A/D Sampling Rate	Max. 200times / Sec
Display Unit	7 segment, 6 digit Red FND

> Model EXP-410N


3 Step Control

■ Option

- ① OP1 : RS-422 / RS-485
- ② OP2 : 0~10V (V-out)
- ③ OP3 : 4~20ma (I-out)
- ④ OP4 : BCD IN
- ⑤ OP5 : BCD OUT



>DIMENSIONS

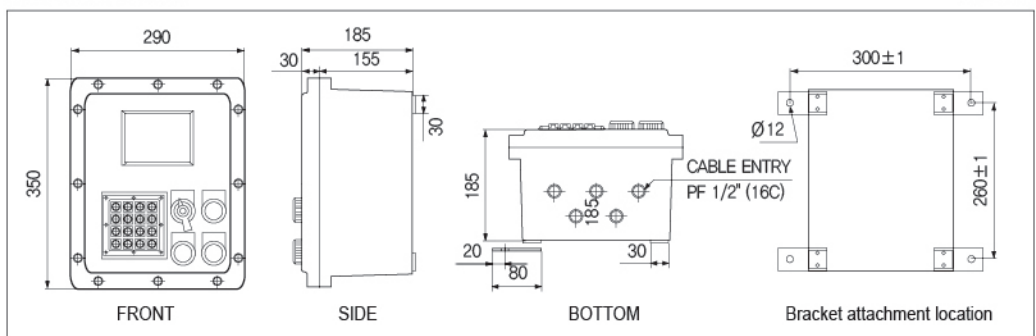


SUMMING BOX

Explosion Proof : EX IIB + H₂T₆

> Model EXP-SB4P

>DIMENSIONS


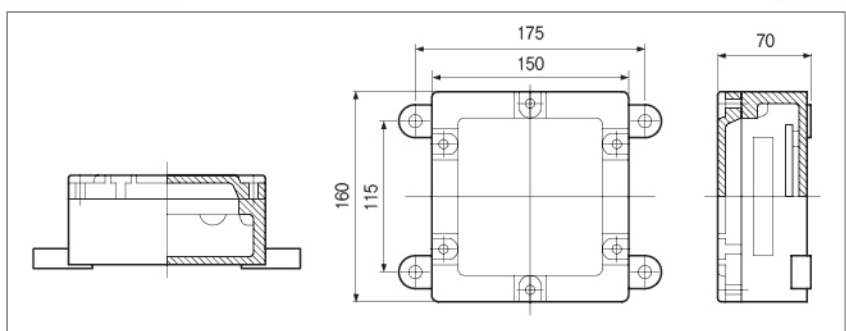


Remote Display

Explosion Proof : EX IIB + H₂T₆

> Model EXP900

>DIMENSIONS

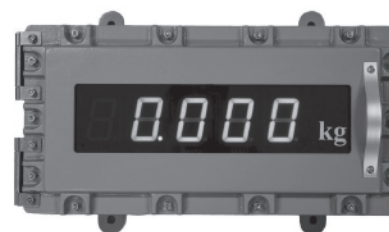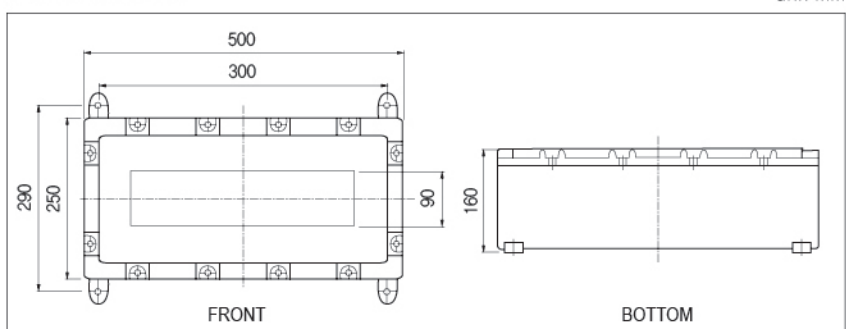

★Specifications are subject to change without notice.